



### MODEL INFORMATION

Model Number	Current	Mounting Style
LEDM10	2 x 10 A	Din Rail Mounting

### ORDER INFORMATION

<b>L E D M 10</b>
-------------------

### INPUT SPECIFICATIONS

DC Input Voltage	0~60 V DC
DC Input Current	2 x 10 A (+45°C ~ +60°C)


### OUTPUT SPECIFICATIONS

MODEL NUMBER	<b>LEDM10</b>
Rated Output Voltage	$V_{\text{INPUT}} - 0.7 \text{ V}$
Continuous Output Current	1 x 20 A (+45°C ~ +60°C)


### GENERAL

MODEL NUMBER	<b>LEDM10</b>
Ambient Temperature	40 °C...70 °C
Storage Temperature	-40 °C...85 °C
Derating	> 60°C / 75% load @ 70°C
Degree of Efficiency	> 97% @ 24 V Input voltage
Mounting position	Horizontal on TS35 mounting rail. 50 mm of clearance at top & bottom for air circulation
Dimension	125 x 113.5 x 40mm (LWH)

### BLOCK DIAGRAM

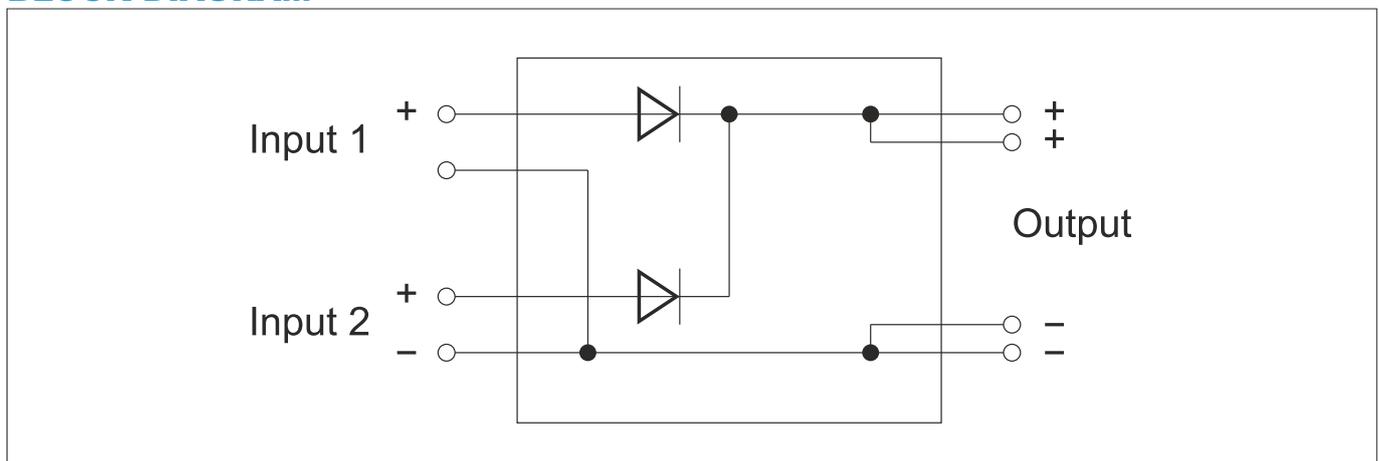

## APPLICATION

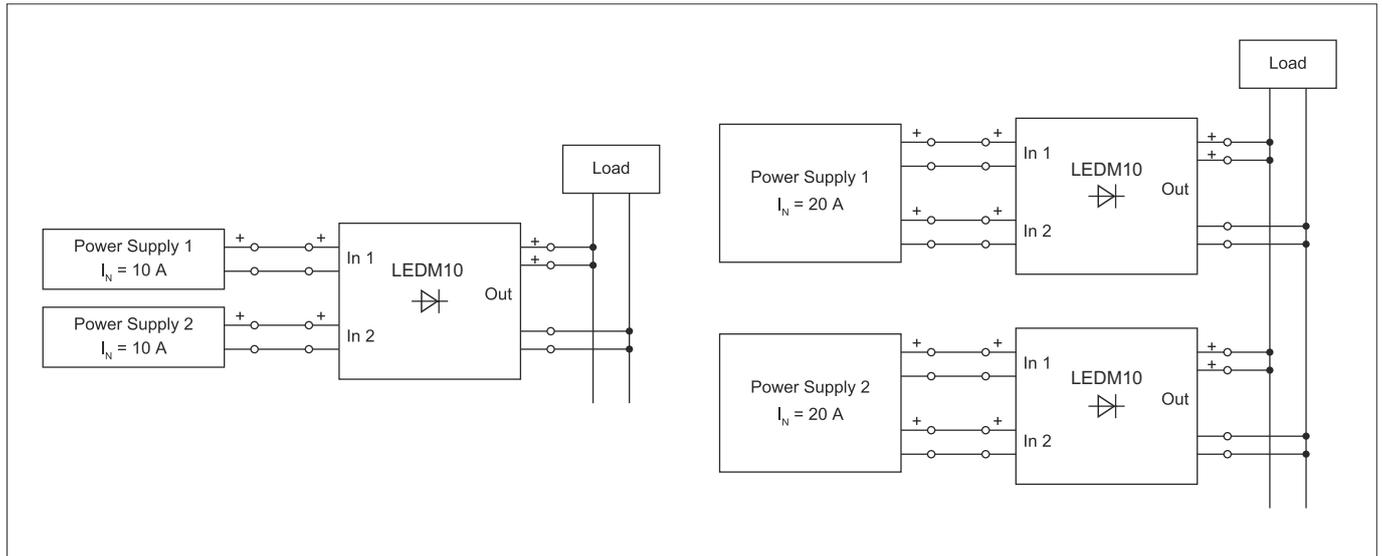

## MOUNTING DRAWING

Unit : mm

