



Prisma iPM Low Voltage Distribution System

Certified assembly as per
IEC 61439 - 1 & 2

100%
IEC 61439-1&2

Life Is On

Schneider
Electric

Innovate with

Prisma iPM solution



Prisma iPM

> An innovative solution based on the experience, expertise and switchgear offerings from the global specialist in energy management.

Using our Prisma iPM solution, you can easily design, implement and operate LV electrical distribution switchboard that are dependable, because they are optimised, tested, compliant and certified as per IEC 61439-1 & 2 standards .



Improve the
continuity of
service



Ensure the
safety of life and
property




Control
deadlines
and costs


For all applications up to 4000 A



Commercial and industrial buildings, hotels, hospitals etc.: a Prisma iPM switchboard can be installed anywhere!

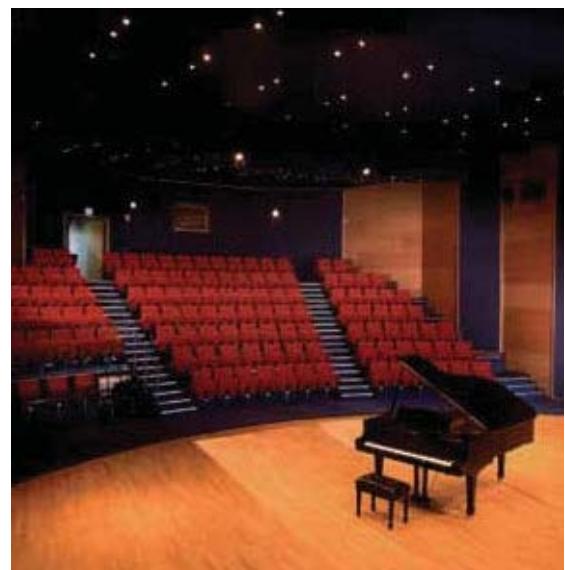

- Floor standing cubicle range
- Wall mounted enclosure ranges
- IP degree: from 30 to 54
- Icw: from 15 kA/s to 85kA/s
- Partitioning up to form 4b

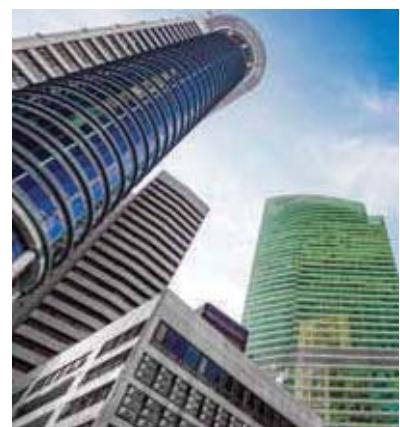

Presentation
IEC 61439 standard

The switchboard, central to the electrical installation

The IEC 61439 standard aims to better define “low-voltage switchgear and controlgear assemblies”, ensuring that the specified performances are reached. It specifies in particular:

> the responsibilities of each player, distinguishing those of the original equipment manufacturer; the organization that performed the original design and associated verification of an assembly in accordance with the standard, and of the assembly manufacturer -the organization taking responsibility for the finished assembly;

> the design and verification rules, constituting a benchmark for product certification.

All the component parts of the electrical switchboard are concerned by the IEC 61439-2 standard.

Equipment produced in accordance with the requirements of this switchboard standard ensures the safety and reliability of the installation.

The Schneider Electric solution

- > Specify switchboards that comply with standard IEC 61439-1 and 2.
- > guarantee a level of safety that has been 100% tested, from the day the switchboard is installed and throughout its service life.
- > ensure a lasting investment through easy upgrading of the installation in compliance with the standard.
- > guarantee that the switchboard complies with the technical specifications.

Prisma iPM tested switchboards

The conformity of the switchboard has been tested and proven.

A Prisma iPM switchboard is:

- > made up of Schneider Electric low-voltage devices and components that all comply with the applicable standards;
- > based on configurations in our catalogue;
- > made up of Prisma iPM mechanical and electrical components that have been subjected to the verification of **original equipment manufacturer**;
- > mounted and wired by a panelbuilder in compliance with professional standards;
- > subjected to the individual verification. Schneider Electric makes available to the panelbuilder everything required to create tested Prisma iPM switchboards, including the basic configurations in the low voltage distribution catalogue, all the documentation for switchboard design and mounting, calculation and design software, etc. Panelbuilders can demonstrate conformity with standard IEC 61439-1 and 2 by presenting the declarations or certificates of conformity for type tests carried out by independent laboratories (ASEFA, ASTA, KEMA, etc.) and supplied by Schneider Electric. The panelbuilder is responsible for the individual routine verification and delivers the corresponding declarations of conformity.

Presentation IEC 61439 standard

The main 10 functions of standard IEC 61439

For each of the following 10 functions, the standard IEC 61439 requires design verifications from the system manufacturer - mainly through type-tests - and routine verifications on each panel from the Panel Builder to achieve 3 basic goals: safety, continuity of service and compliance with end-user requirements.



Safety

Voltage stresses withstand capability

To withstand long term voltages, and transient and temporary overvoltages according to the insulation coordination principles and requirements.

Current-carrying capability

To protect against burns and to withstand temperature rise:

- > when any circuit is continuously loaded, alone, to the specified current
- > when the assembly is loaded to the specified current according to the specified load pattern (between circuits and/or as a function of the time).

Short-circuit withstand capability

To withstand the stresses resulting from the prospective short-circuit current and from the associated data (High forces between conductors, temp. rise in a very short time, air ionization, overpressure).

Protection against electric shock

- > Hazardous-live-parts not to be accessible (basic protection)
- > Accessible conductive parts not to become hazardous-live (fault protection).

Protection against risk of fire or explosion

- > Resistance to internal glowing elements
- > Note: Protection of persons, and optional protection of the assembly, against arcing due to internal fault can be specified through a "special test" according to IEC 61641.



Continuity of service

Maintenance and modification capability

Capability to preserve continuity of supply without impairing safety during assembly maintenance or modification

- > Electrical condition of the assembly or various circuits
- > Speed of exchange of the functional units
- > Test facilities...

Electro-Magnetic compatibility

To properly function (immunity) and not to generate EM disturbances (emission) in specified environmental conditions:

- > Industrial networks or locations (Environment A)
- > Domestic, commercial, and light industrial locations (Environment B).



Compliance with end-user requirements

Capability to operate the electrical installation

To properly function, according to:

- > The electrical diagram of the overall system and related information (voltages, coordination...)
- > The specified operating facilities (e.g. free or restricted access to Man Machine Interfaces, isolation of the outgoing circuits, ...).

Capability to be installed on site

- > To withstand handling, transport, storage... and installation constraints
- > Capability to be erected and connected (type of enclosure, type, material and cross sectional areas of external conductors).

Protection of the assembly against mechanical and atmospheric environmental conditions

- > Presence of water or solid foreign bodies (IP according to IEC 60529)
- > External mechanical impacts (optional IK according to IEC 62262)
- > Indoor or outdoor installation (humidity, UV).

Functional panels for tertiary and industrial buildings

Prisma iPM... 100% and more than



Short-circuit withstand capability

- Conditional short-circuit test is passed thanks to full coordination using Schneider Electric's devices associated with Prisma iPM distribution components from incoming to outgoers stages
- This panel design characteristic allows a much improved service continuity of the switchboard in case of electrical fault.



Protection against electrical shock

- IPxxB Prisma iPM offers standard components to achieve the right level of electrical protection.
- Terminal block covers
- Terminal shields for devices
- Partitioning for busbar and connections



Voltage stress withstand capability

- Creepage distances and clearance distances: all functional units are designed from an early engineering stage taking into account minimum clearance distance for any type of assembly of Schneider Electric devices configuration. For instance the Compact NSX breaker can be installed with a rotary handle or motor control or plugin base with guaranteed clearance distances.
- For creeping distances all busbar supports are designed to take into account minimum creepage distances required by the IEC standard.





IEC standard



Maintenance and modification capability

- Beyond IPxxB for pane accessibility Prisma iPM functional system has been designed to offer a clear and logical electrical organisation. It enables safer and more secure accessibility for maintenance and upgrades.
- Interventions are made quicker with reduced risks of mistakes therefore decreasing down time and improving service continuity.



Linergy busbar

- Linergy busbar can safely be accessed for installation upgrade by removing a single Form 2 front barrier only.
- All conductors are shifted 25mm enabling qualified electricians to perform intervention from the front of the cubicle only no need to dismantle the side partitioning for access.
- Upgrade or maintenance interventions are made faster and more straight forward.




Capability to operate the electrical installation

- Prisma iPM components are designed to match Schneider Electric's devices with impulse voltage withstand reaching up to 12.8kV specification.
- Customers are guaranteed to have the right safety margin in case of network transients, increasing safety and installation service continuity over time.

Capability to be installed on site

- In addition to being lift-tested, Prisma iPM also features handling plinths in order to cover all possibilities for site installations where lifting space is too limited.

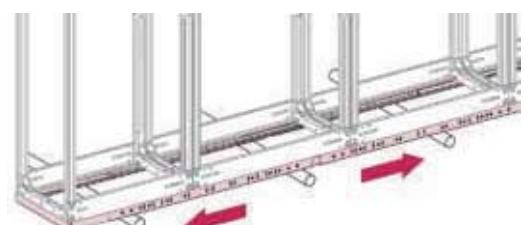

Dedicating ourselves to safe, simple & reliable low voltage switchboards from 100 to 4000A

Prisma iPM, a modular and prefabricated solution based on a complete system in kit form that perfectly integrates Schneider Electric switchgear offerings.

Energy is available in the buildings


The Prisma iPM solution perfectly integrates Schneider Electric switchgear and includes our distribution systems and enclosures.

These quality components have been designed to operate together with optimised performance: mechanical, electrical and communications consistency.

Switchboards designed and manufactured with the Prisma iPM solution have all the qualities needed to ensure energy availability. They are organised by function and by zone, which improves reliability and facilitates design, installation, operation and upgrading. All switchboard architectures are factory tested in line with specifications that go well beyond the IEC 61439-1 standard. The same continuity of service is ensured throughout the switchboard's entire life cycle.



> Example of floor standing switchboard

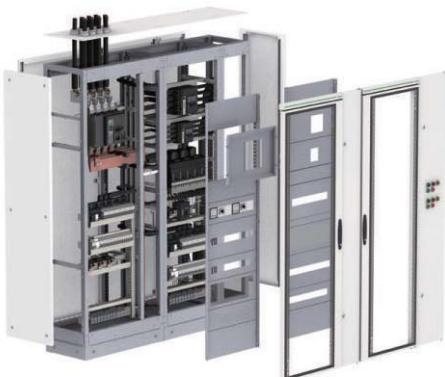

> Example of 28 modules wall mounted switchboard



> Example of 16 modules wall mounted switchboard

1 A cable connection area with complete accessibility.

2 A zone for functional units* dedicated to each application in the building (lighting, HVAC, lifts, etc).
* A functional unit includes switchgear, mounting plate and front plate.

3 A zone for current distribution with innovative busbars. The multistage current distribution brings lightness, ergonomics and easy front access

4 IPXXB front plates for protecting people from any direct access to live parts and circuits opening and closing.

5 Attractive finish to fit into any facility

Technical data

Floor standing enclosures

	A	lcw	IP	IK	No. of mod.	height	width	depth	associability
Cu	upto 4000 A	upto 85 kA rms/1s	30/31/40/54	07 08 10	36	2000 mm	300 mm 400 mm 600 mm 600 + 200 mm 800 mm	400 mm 600 mm 800 mm 1000 mm	width
Al	upto 3600 A	upto 65 kA rms/1s	42/54	10	36	2000 mm	300 mm 400 mm 600 mm 600 + 300 mm 800 mm	600 mm 1000 mm 1200 mm 1600 mm	width

Wall mounted enclosure

	A	lcw	lpk	IP	IK	No. of mod.	height	width	depth	associability
Full kits	630 A	25 kA rms/1s	53 kA	30/31/40/ 41/54	07/08/ 10	4 6 12 16 20 24 28 32	300 mm 500 mm 700 mm 900 mm 1100 mm 1300 mm 1600 mm 1800 mm	600 mm (enclosure) 300 mm (cable duct)	235 mm 235 mm 235 mm 235 mm 235 mm 235 mm 305 mm 305 mm	width and height width
Enclosures (partial kit)	630 A	25 kA rms/1s	53 kA	30/40/41	07/08	4 8 12 16 20 24 28 32	700 mm 900 mm 1100 mm 1300 mm	600 mm	235 mm	

The Prisma iPM solution perfectly incorporates Schneider Electric switchgear:

- > Easypact MVS > Acti 9
- > Easypact CVS > GV2L
- > Masterpact MTZ > LC1 contactors
- > Masterpact NW > LRD thermal relay
- > Compact NS > ATV 61/71
- > Compact NSX > ATS 48C/48D



Lubi Electronics

Sardar Patel Ring Road, Nr. Karai Gam Patia, Nana Chiloda, Dist. : Gandhinagar - 382 330. Gujarat, INDIA

Tel. : +91-79-6674 5300 Fax : +91-79-6674 5599 E-mail : info@lubielectronics.com

Website : www.lubielectronics.com

Schneider Electric India Pvt. Ltd.

Corporate Office

9th Floor, DLF Building No.10, Tower C, DLF Cyber City,

Phase II, Gurgaon - 122002, Haryana.

Phone: 0124 3940400, Fax: 0124 4222036

www.se.com

Customer Care Centre

Toll-free numbers: 1800 103 0011, 1800 419 4272

General number: 0124 4222040

Email: in.campaign@se.com