

LESA150D24

SPECIFICATION


MODEL		LESA150D24	
OUTPUT	DC VOLTAGE	24V	
	RATED CURRENT	6.5A / 230VAC	5.2A / 115VAC
	CURRENT RANGE	0~6.5A / 230VAC	0~5.2A / 115VAC
	RATED POWER	150W	
	RIPPLE & NOISE (max.)	150mVp-p	
	VOLTAGE ADJ. RANGE	24~28V	
	VOLTAGE TOLERANCE	± 1.0%	
	LINE REGULATION	± 0.5%	
	LOAD REGULATION	± 1.0%	
	SETUP, RISE TIME	1200ms, 60ms/230VAC	2500ms, 60ms/115VAC at full load
	HOLD UP TIME (Typ.)	16ms/230VAC	10ms/115VAC at full load
INPUT	VOLTAGE RANGE	90 ~ 264VAC	127 ~ 370VDC [DC input operation possible by connecting AC/L(+), AC/N(-)]
	FREQUENCY RANGE	47 ~ 63Hz	
	EFFICIENCY (Typ.)	85%	
	AC CURRENT (Typ.)	2.6A/115VAC	1.7A/230VAC
	INRUSH CURRENT (Typ.)	20A/115VAC	35A/230VAC
	LEAKAGE CURRENT	<1mA / 240VAC	
PROTECTION	OVERLOAD	105 ~ 130% rated output power	
		Protection type : Constant current limiting, recovers automatically after fault condition is removed	
	OVER VOLTAGE	29 ~ 33V	
		Protection type : Shut down o/p voltage, re-power on to recover	
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover	
ENVIRONMENT	WORKING TEMP.	-20 ~ +60°C	
	WORKING HUMIDITY	20 ~ 95% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH	
OTHERS	DIMENSION	40.0 x 125.2 x 113.5mm (WxHxD)	

Switch Mode Power Supply

LESA150D24

● Mechanical Specification

Unit:mm

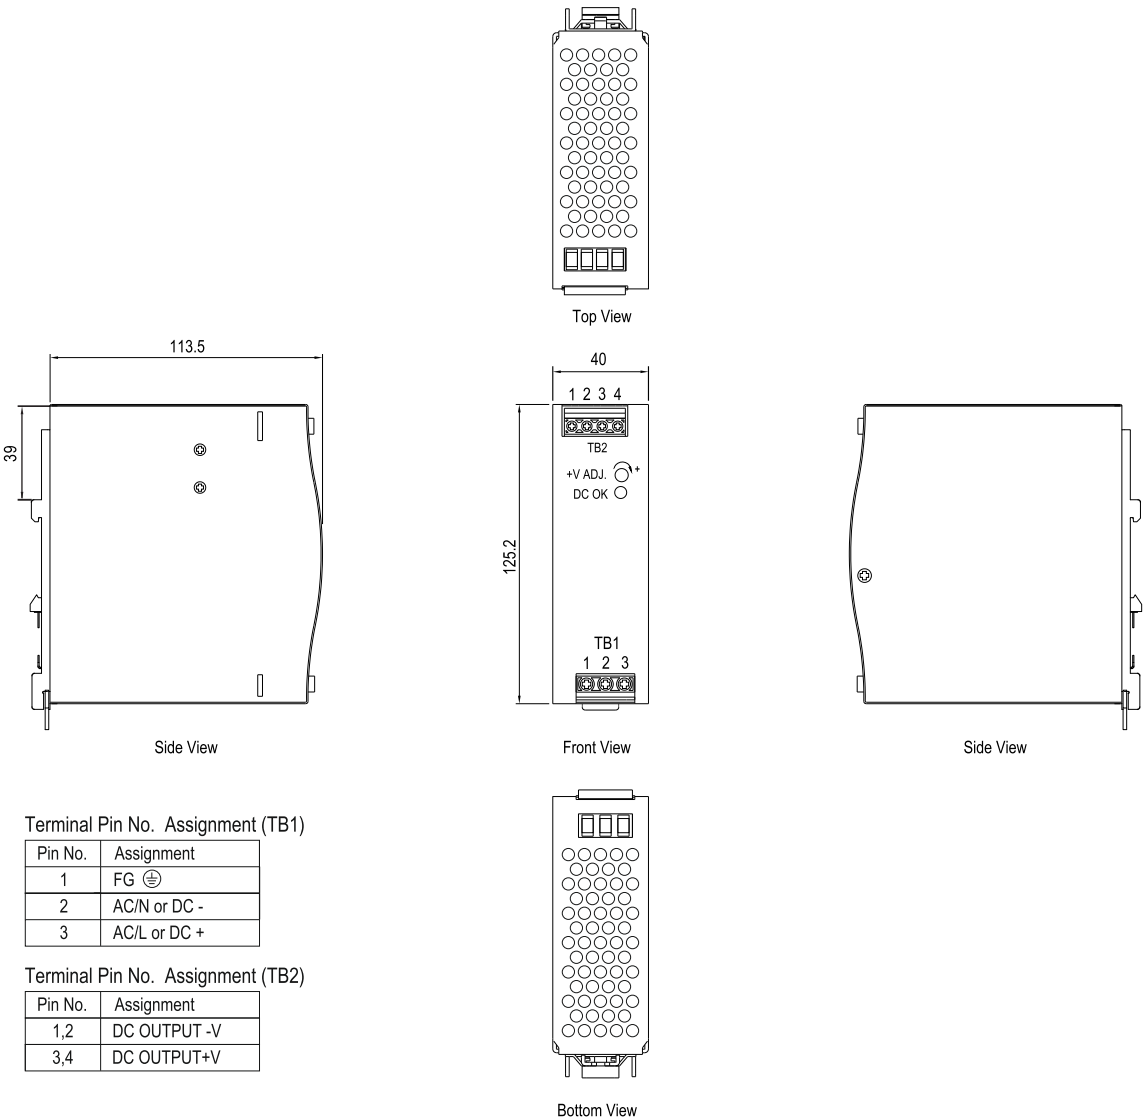

● Installation Instruction

